



PKS

Stainless steel marking

- Complete marking system for cables, pipes and components.
- Single-character and multi-character markers which can be combined on site.
- Enhanced durability and top quality.

General information

Design

The system comprises marker carriers with holes at either end or as raised bridges for direct threading of cable ties, enabling rapid fitting.

Single-character markers are threaded and combined over the carrier, and fixed over its bottom edge.

For multi-character marking, text is stamped on the marker carriers themselves, to form complete multi-character markers.

Marker carriers can be stamped with permanent text that can then be combined with single-character markers.

Technical specification

Product performance

Non-flammable

Good resistance to heat, cold, corrosion, acids, chemicals.

Material

Acid-resistant stainless steel to Swedish Standard SIS2348:

EN 1.4404

AISI 316L

BS 316S 11

Product of attachment


- Stainless steel cable ties
- Coated stainless steel cable ties
- Plastic cable ties (suitable only for large slot)
- Rivets or screws
- Stainless steel cable tie mount

Single-character marking and carrier strips


Dimensions and packaging

Article number	Designation	Max no. of single-character markers	Quantity per pack	Length mm (L)	Width mm (W)	Slot width mm (SW)
PKS10006PP.#	Single-character marker	-	50 (5x10) pcs	5,5	10,9	-
PKS10040FQ ^	47 MM Carrier strip	6	50 pcs	47,0	10,3	4,8
PKS10060FQ ^	65 MM Carrier strip	9	50 pcs	65,0	10,3	4,8
PKS10080FQ ^	87 MM Carrier strip	13	50 pcs	87,0	10,3	4,8
PKS10100FQ ^	107 MM Carrier strip	17	50 pcs	109,0	10,3	4,8
PKS10120FQ ^	128 MM Carrier strip	20	50 pcs	128,0	10,3	4,8


#=characters
^=(S=slot), (H=hole)

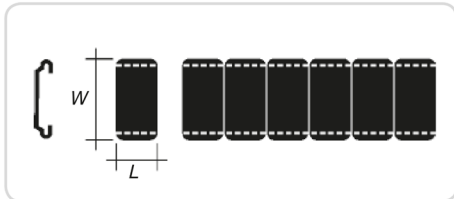

Single-character markers.

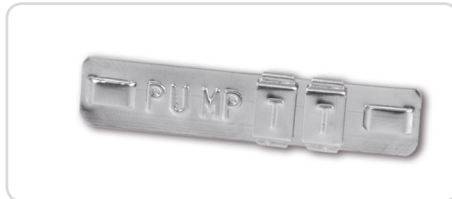

PKS10040-PKS10120 not stamped with text can be used as carrier strips for single-character markers. The carrier strips can also be pre-stamped and combined with single character markers.

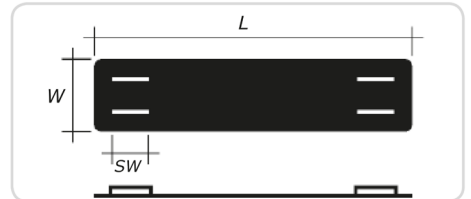

Carrier strip for single-character markers or ready marked multi-character marking.

Marker carriers, customized pre-stamped multi character

Dimensions

Article number	Length mm (L)	Width mm (W)	Max No. of rows	Text height	Slot width (SW)	Slot height	Thickness
PKS10* ^	039, 050x, 070x, 090x, 110x, 130	10	1	6,0	4,8	0,5/1,5	0,3
PKS10* ^2	039, 050x, 070x, 090x, 110x, 130	10	2	3,8	4,8	0,5/1,5	0,3
PKS19* ^	050, 070, 090, 110, 130	19	3	3,8/6,0	4,8	0,5	0,3
PKS25* ^	050, 070, 090, 110, 130	25,4	4	3,8/6,0	4,8	0,5	0,3
PKS32* ^	050, 070, 090, 110, 130	32	4	3,8/6,0	4,8	0,5	0,3
PKS38* ^	050, 070, 090, 110, 130	38	4	3,8/6,0	4,8	0,5	0,3
PKS10*LS	076	10	1	6,0	4,8	1,5	0,3
PKS10*LS2	076	10	2	3,8	4,8	1,5	0,3

^= S (slot with slot height 0,5mm), H (hole)

x= S (slot with slot height 0,5mm), H (hole), LS (large slot with slot height 1,5mm).

PKS with large slot LS has perfect fit with standard cable ties in Nylon, for example PKB25100A0.

*=Length, see above

Max no of characters (PKS with slot or hole)							
Marker length	39	50	70	76	90	110	130
Text height 6,0	5	8	13	12	18	23	28
Text height 3,8	5	11	18	16	26	33	41

Max no of characters (PKS with large slot)					
Marker length	50	70	76	90	110
Text height 6,0	5	10	12	15	21
Text height 3,8	7	14	16	21	28



Customized, pre-stamped multi-character marker mounted on a cable.



Customized, pre-stamped multi-character marker.



Customized, pre-stamped multi-character marker with four line of text.